

# Sami

WEARABLE  
User Manual  
WS-2342




SMART WATCH

Thank you for purchasing the **Sami** wearable WS-2342. Read the instructions carefully to obtain optimum results and preserve it for future reference. **Sami** has developed wearable devices since 2015 and we use the best components possible for the product.

**This product is not suitable for children below 5 years. Suitable ages 5-12 years.**



Connect the device to a computer or laptop with the USB Magnetic cable for charging. Put in contact the magnetic end of the usb cable with the charging points positioned in the back of your device. Kindly use only the USB cable included with the wearable. If you use a power adapter for charging, the output of the power adapter should be 5V, 1A. Charging time: 2hours. Please charge the device fully before using it. Take care of the magnet side of the cable, if connect to AC and you have contact with a metal surface, you may damage the charging cable

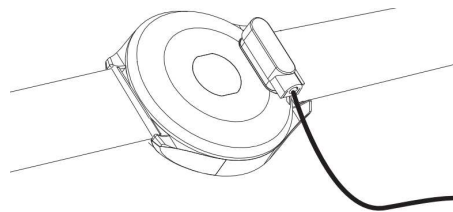

## HOW TO POWER ON / POWER OFF?

- 1) To turn ON the smart watch, long press the Power button for few seconds to make it Power On.
- 2) To turn OFF the smart watch, long press the Power button for few seconds to make it Power Off; once the smart watch has been registered to the SeTracker2 APP, it can't be Power Off by long pressing the Power Button, and it can only be Power Off at the SeTracker2 APP. If you try to off on the watch, you will get a ALARM SOS message on your phone on app and by SMS
- 3) The smart watch will be Power Off automatically, once it is run out of Power.

## HOW TO CONTROL?


- 1) On the display screen (touchscreen), short tap the touchscreen to select, long tap to enter; tap and slide left/right/up/down to change between the different menu pages.
- 2) Short press the Return Button to return. The Return Button is situated at the centre bottom of the display screen.
- 3) Short press the Power Button to light up/ light off the display screen; short press the Power Button to return to home screen interface. Long press the Power Button to make the smart watch Power On/Power Off/SOS.

## GETTING STARTED:

>>>**Step One:** Fully charging the smart watch. It will take 2 hours.

>>>**Step Two:** Insert a valid *Micro SIM Card* into the SIM card slot. **Do NOT try to insert a Nano SIM Card.**

**NOTE:** When you are going to insert in a Micro SIM card, make sure the smart watch is Power OFF. Or else it will need you to restart the smart watch after the Micro SIM card has been inserted in.

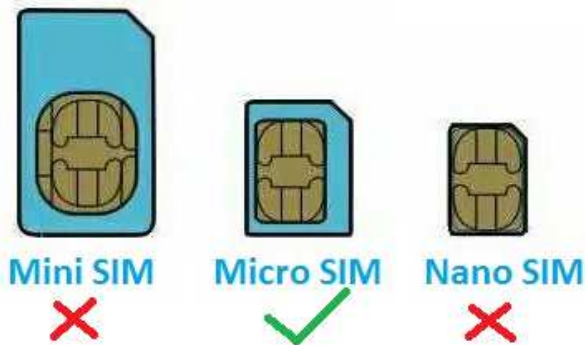

**Make sure the Micro SIM card,**

\*\*\*a valid Micro SIM card;


\*\*\*must applied the Mobile Internet Data service, which is provided by the Telecom provider;

\*\*\*must applied the incoming phone call number displaying service, which is provided by the Telecom provider.

### How to insert the Micro SIM card into the SIM card slot?

Firstly, there is a small screwdriver provided in the gift box, use the small screwdriver to take off the screw from the shell of SIM Card Slot.

Secondly, take off the shell, and then insert the Micro SIM card into the SIM card slot. Follow below sketch.

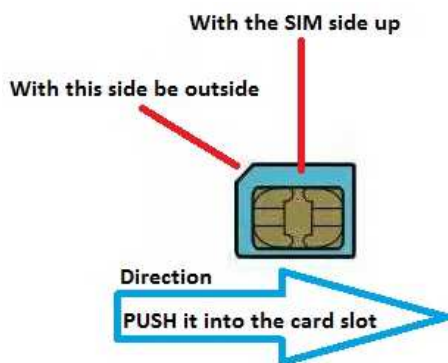

You can hear a tiny sound once the Micro SIM card has been inserted into the SIM card slot and into the right position.

To take the Micro SIM card out from the card slot, push it in towards inside, to let the Micro SIM card bounce off the slot.

Do not throw away the Black Elastic when you open the Card slot shell. The smart watch won't be splashproof anymore, if you throw away the black elastic.

**This product communication is on 2G data system. The 2G network must be available in your country.**


>>>**Step Three:** Download and to install the **SeTracker2**. (Do NOT download the SeTracker). If you have Android use Play Store and if have IOS system, use the APP STORE.

Install the SeTracker2 on your Android smart phone or iPhone.

Always tap OK/Yes/Confirm/Accept/Allow for any pop-up requests.

**NOTE:** The APK/APP should be **SeTracker2**. Do not mistake to use **SeTracker**.

>>>**Step Four:** At your smart phone, run the SeTracker2, register a new account and use the new account to log on the SeTracker2. Before log on the SeTracker2, the Area must select Europe and Africa. It will be displayed on the Log on interface of the SeTracker2

>>>**Step Five:** At SeTracker2, tap the waterdrop icon  which is situated at the right top → tap Device List → tap Add

Device → tap the Scan icon  which is on the right side of 'Please scan or input device ID'; at the same time, on the

display screen of the smart watch, tap and slide to find the Device Info → tap Register Code , scan this Register Code to make the smart watch register to the SeTracker2 APP. (The Register code also can be found on the back of the smart watch). The device code will be input automatically then. → input a nickname → select the relationship to the kid, for example, I am Dad → tap OK to finish the registration of smart watch.

>>>**Step Six:** At SeTracker2, tap the Settings icon which is situated at the centre bottom → tap Phone Book → input the contact name(s) and the mobile phone number(s) → tap Save. The Contacts which saved at the Phone Book at SeTracker2, will be sync to the Phone Book of the smart watch automatically.

Only the saved phone number(s) can make phone calling to the smart watch. You can call the smart watch directly at your smart phone; it does not support to dial at the SeTracker2.

**NOTE:** Maximum 10 contacts can be pre-set at the Phonebook of SeTracker2.

**After above six steps, the smart watch has been completely registered.**

Furthermore, there are more functions can be found at SeTracker2 as following,

#### **SETTINGS**

- SOS Number
- Location Update Schedule
- Sound Guardian
- Family Members
- Do Not Disturb
- SMS Alerts
- Set Local Base Station
- Watch Finder
- Phonebook
- Switch setting
- Language
- Time Zone
- Shutdown the Device
- Remote Restart
- Exit

#### **LEFT TOP Menu**

- Remove ADS
- Message
- Alarm Clock
- Rewards
- Remote Camera

#### **RIGHT TOP Menu**

- Personal Info
- Device List
- Change Password
- Exit

## BOTTOM Menu



Chat: instant message chat in group

Geofence: safety zone

Settings

Locate

History

## PRODUCT FEATURES

### POWER BUTTON

### TOUCH RETURN BUTTON

**TOUCH SCREEN.** Capacitive touch screen 1.44"

### BUILT IN SPEAKER

### BUILD IN MICROPHONE

### BUILD IN LBS LOCATIONING

### BUILD IN 2G GSM MODULE

### BUILD IN WIFI LOCATIONING

### DISPLAY SCREEN OF THE SMART WATCH

Time/Date/Battery/SIM card signal/Red Heart

Dial

Phonebook

Camera

Photo

Learning Game

Talk : instant message chat. Can send only voice message from the watch. From the app can send voice message or text message.

Device Info : including App Download, Register Code.

## FUNCTIONS

**PHONE CALL** - from the smart watch can dial any phone numbers to make phone calls.

**PHONE CALL** - only the pre-set phone numbers can dial phone calls to the smart watch.

**CHAT / TALK** - instant voice message chat in group

**SOS** - one key(long press the Power Button) to dial the pre-set phone numbers

**GEOFENCE** – safety zone. Can be set at the SeTracker2. It will alarm you once the kid is going out of the digital map fence.

**REMOTE CAMERA** - the smart watch & the kid will not be disturbed when using the smart watch's camera to remote view.

**REMOTE SOUND HEARING** - the smart watch & the kid will not be disturbed when using this function to hear the sound.

(settings--- sound guardian) **This function depending on your country can be available or not due to regulations.**

### MAP TRACE TRACK

### REAL-TIME LOCATION VIEW AT MAP AT SETRACKER2

## TECHNICAL SPECIFICATIONS:

**Display screen:** Full screen capacitive touch screen 1.44".

**Screen resolution:** 128x128pixels.

**Internal Memory:** RAM 32MB, ROM 32MB

**System:** Nucleus

**CPU:** RDA8955

**Camera:** 0.08MP

**Locationing:** LBS Locationing + WIFI Locationing

**Network:** 2G GSM

**GSM Band:** 1900/1800/850/900

**SIM Card Slot:** support Micro SIM card

**Charge I/O port :** USB magnetic charging cable

**Battery:** Built in Li-Polymer 400mAh

**Stand by time:** 2~3 DAYS

**Working time:** 1~2 DAYS

**Water-resist Rating:** IP67 (this device resists raindrops, it's not water proof)

**Weight:** 46g

# Declaration of Conformity

Hereby we,

Name of manufacturer: SANTOSHI SL  
Address: CALLE FELIPE ASENJO N.56  
Zip code & City: 28947 - FUENLABRADA ( MADRID )  
Country: SPAIN

declare that this DoC is issued under our sole responsibility and that this product:

Product description: SMARTWATCH  
Type designation(s): WS-2342  
Trademark: SAMI WEARABLE

is in conformity with the relevant Union harmonization legislation:

**DIRECTIVE EMC 2014/30/EU**  
**DIRECTIVE LVD 2014/35/EU**

**Standard CE (RED): DIRECTIVE 2014/53/EU**  
**Standard RoHS: 2011/65/EU: (RoHS) Restriction of Hazardous Substance.**  
**Amendment RoHS: Directive (EU)2015/863**

with reference to the following standards applied:

Health & Safety	EN 50566:2017
	EN 62209-2:2010
	EN 62479:2010
	EN 60950-1:2006 + A11:2009 + A1:2010+A12:2011+A2:2013
Electromagnetic Compatibility	Draft EN 301 489-1 V2.2.1
	EN 301 489-19 V2.1.1
	Draft EN 301 489-52 V1.1.0
	EN 55032:2015
	EN 55035:2017
	EN 61000-3-2:2014
	EN 61000-3-3:2013
Effective Use of Spectrum	EN 301 511 V12.5.1
	EN 303 413 V1.1.1

Signature



Full name: VISHAL MIRPURI

Position: ADMINISTRATOR

Date: 31 / 12 / 2019